


CG-16 Clear Polycarbonate Corner Guard

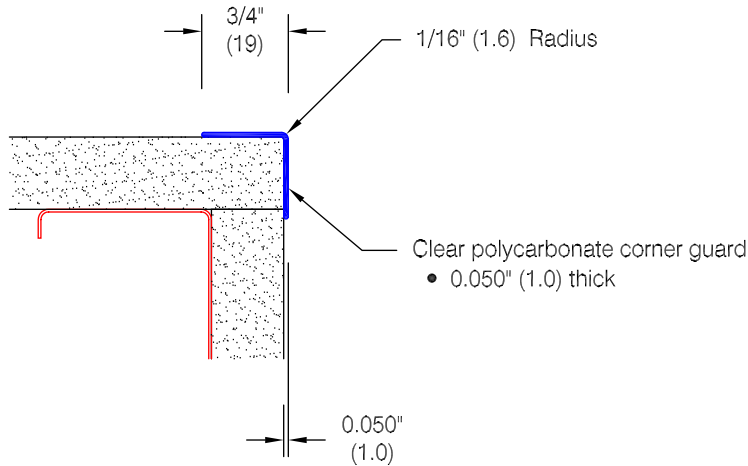

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 Smooth Finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape

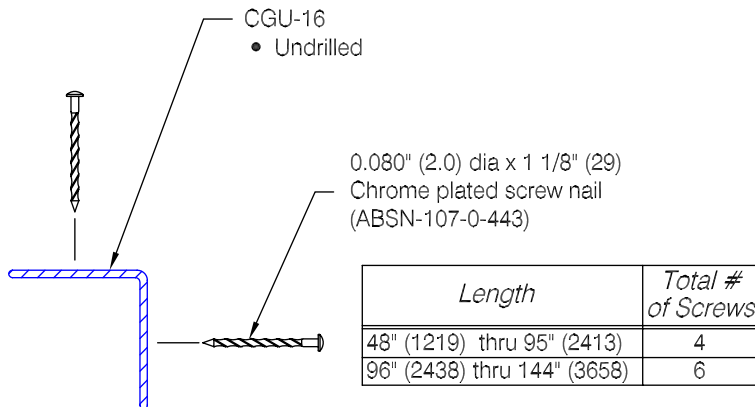

Standard Screw Nail Mounted




Optional Tape Mounted
 (Specify CGT-16)

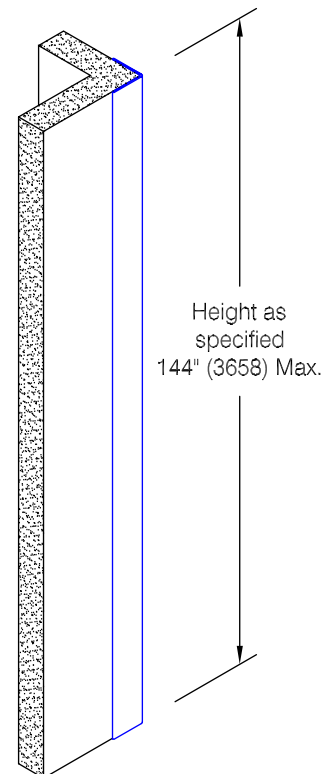

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.113.0b
Architect :	Sales Rep :	

CG-17 Clear Polycarbonate Corner Guard

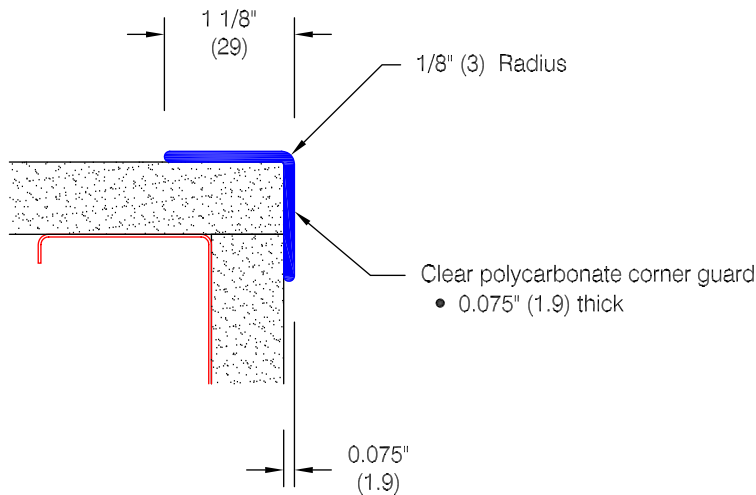

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 Smooth Finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (Fastening method by others)

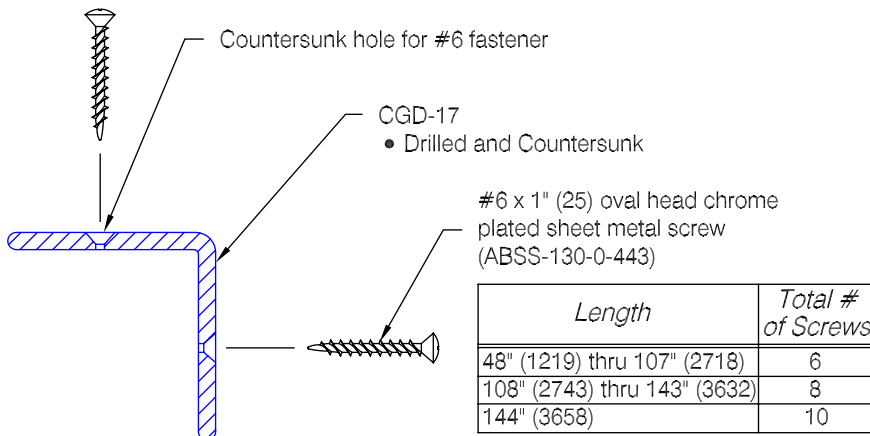


Standard Screw Mounted

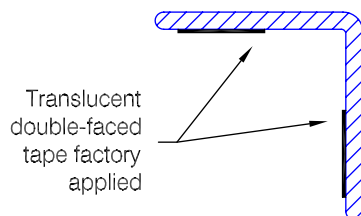

Optional Tape Mounted
 (Specify CGT-17)



Optional Undrilled
 (Specify CGU-17)

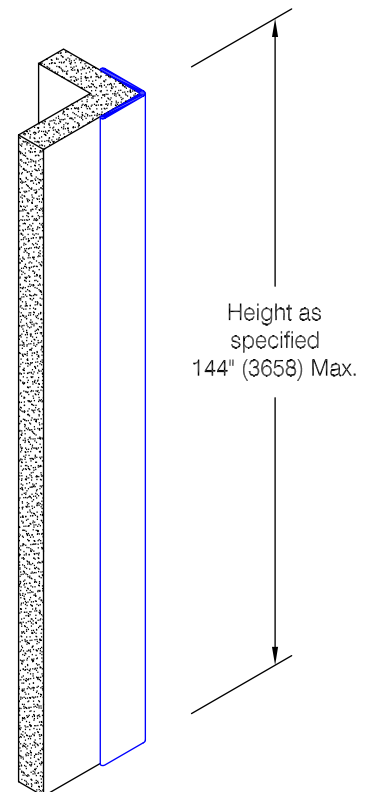

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.114.0b
Architect :	Sales Rep :	

CG-18 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (fastening method by others)

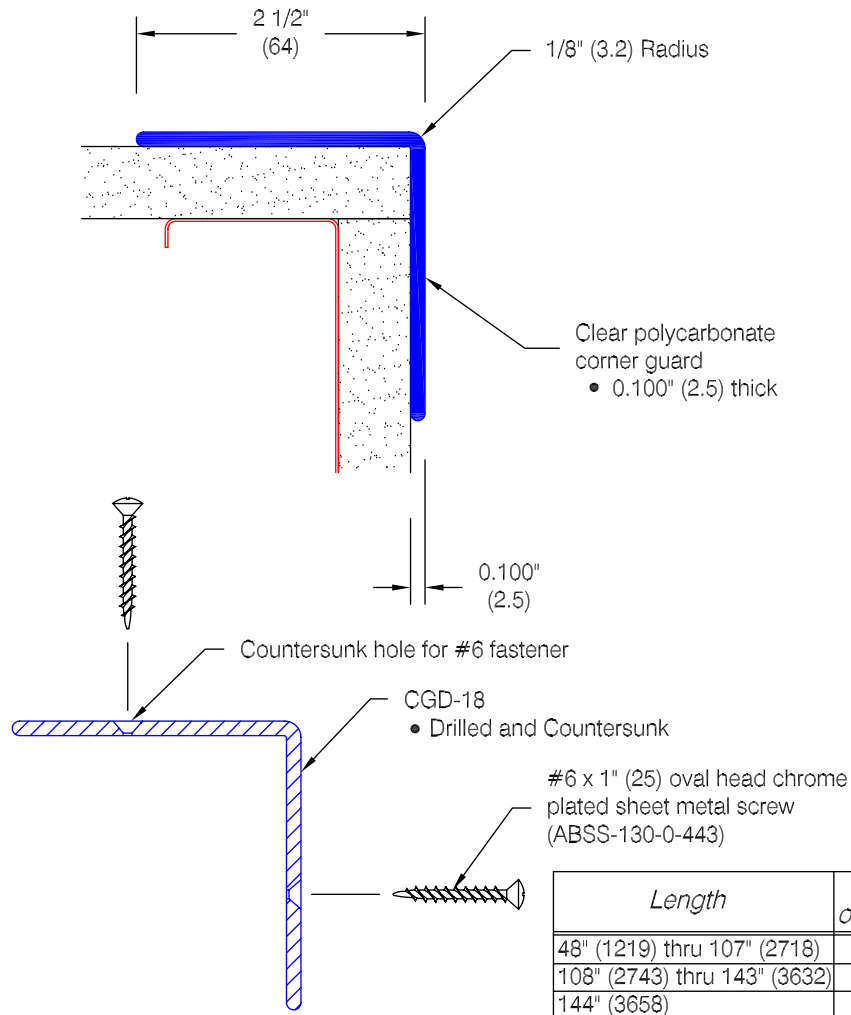


Standard Screw Mounted

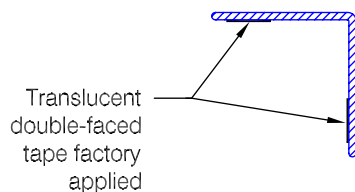

Optional Tape Mounted
 (Specify CGT-18)



Optional Undrilled
 (Specify CGU-18)

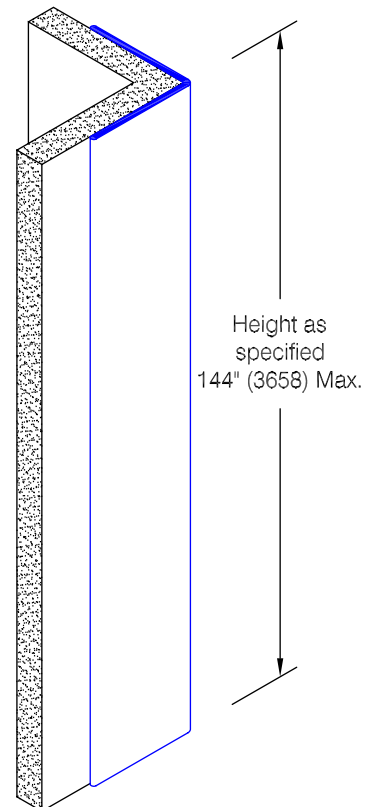

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.115.0b
Architect :	Sales Rep :	

CG-19 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:

- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:

- Double-faced tape
- Undrilled (fastening method by others)

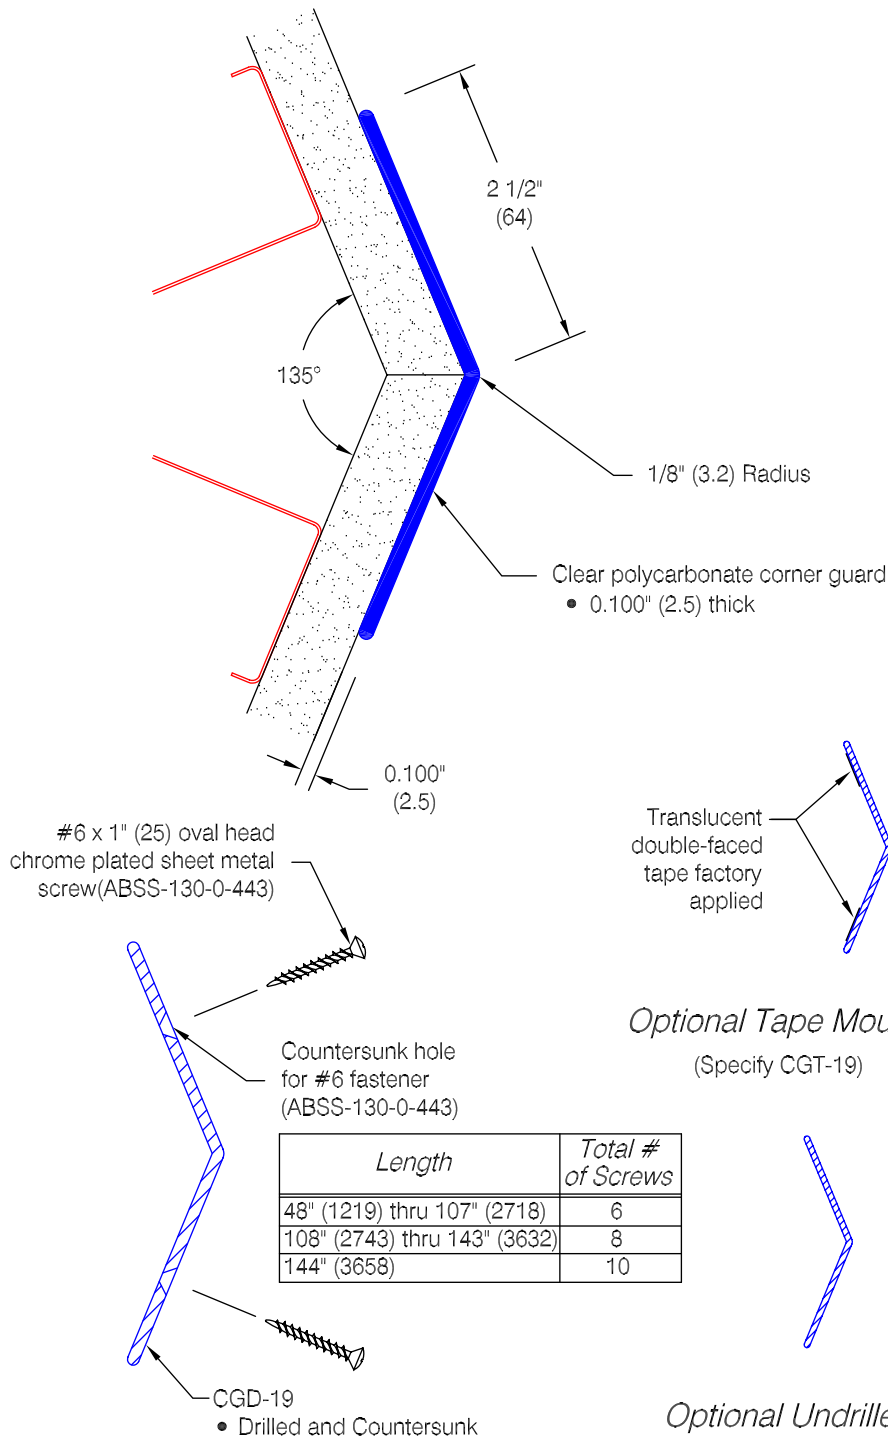

Standard Screw Mounted

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.116.0b
Architect :	Sales Rep :	

CG-23 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (fastening method by others)

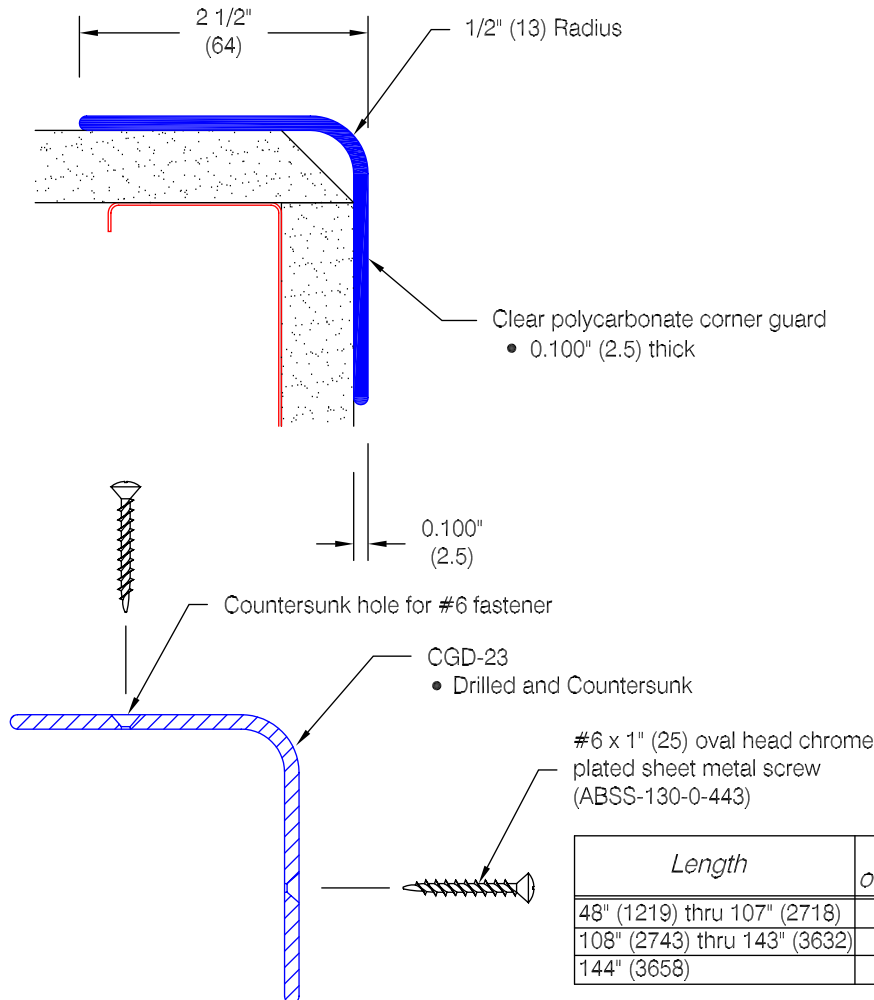


Standard Screw Mounted



Optional Tape Mounted
 (Specify CGT-23)




Optional Undrilled
 (Specify CGU-23)

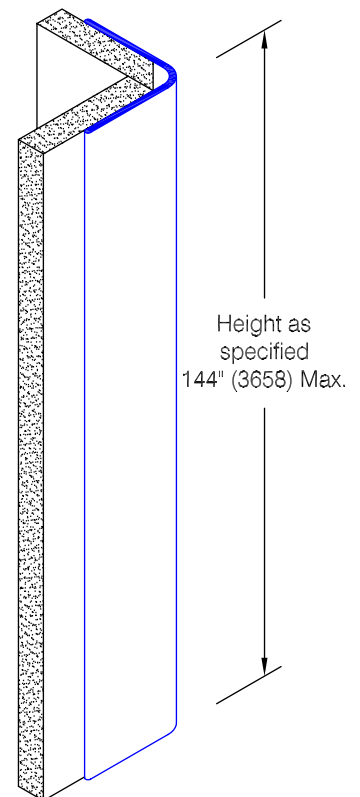


Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.118.0b
Architect :	Sales Rep :	

CG-24 Polycarbonate Corner Guard

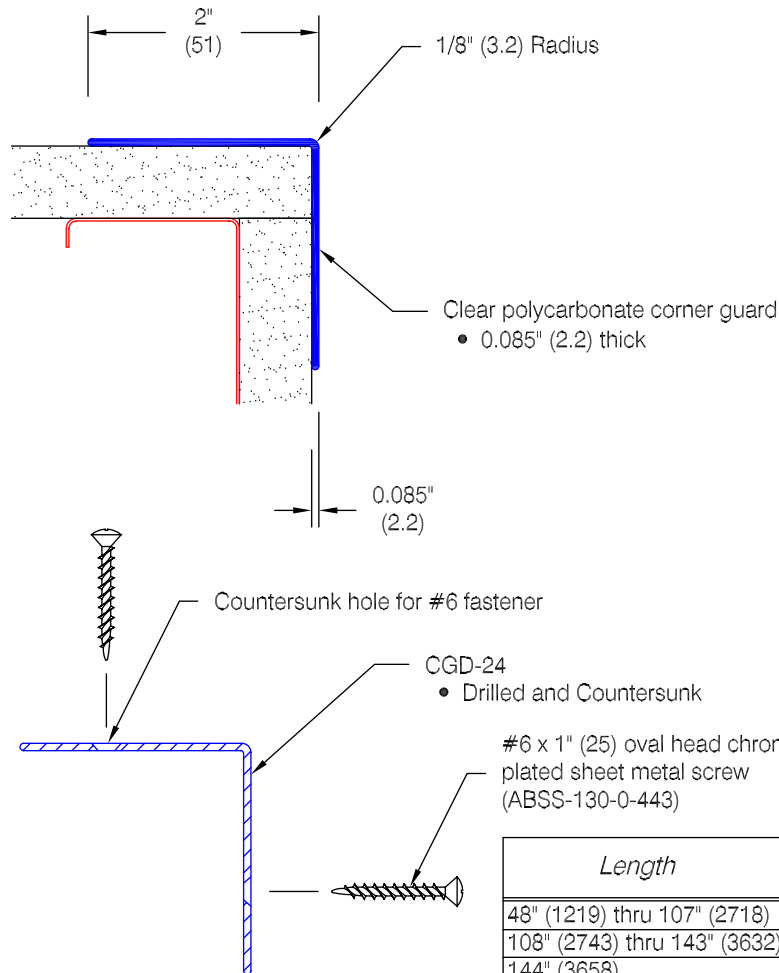

Standard Screw Mounted



Optional Tape Mounted
 (Specify CGT-24)



Optional Undrilled
 (Specify CGU-24)

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:

- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:

- Double-faced tape
- Undrilled (fastening method by others)

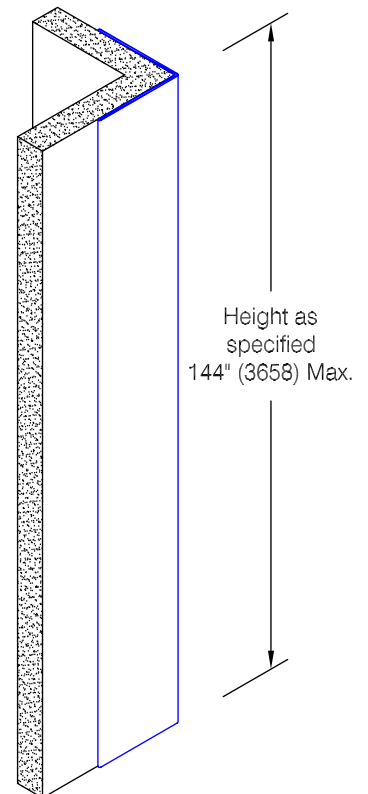

Length	Total # of Screws
48" (1219) thru 107" (2718)	6
108" (2743) thru 143" (3632)	8
144" (3658)	10

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.119.0b
Architect :	Sales Rep :	

CG-25 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (fastening method by others)

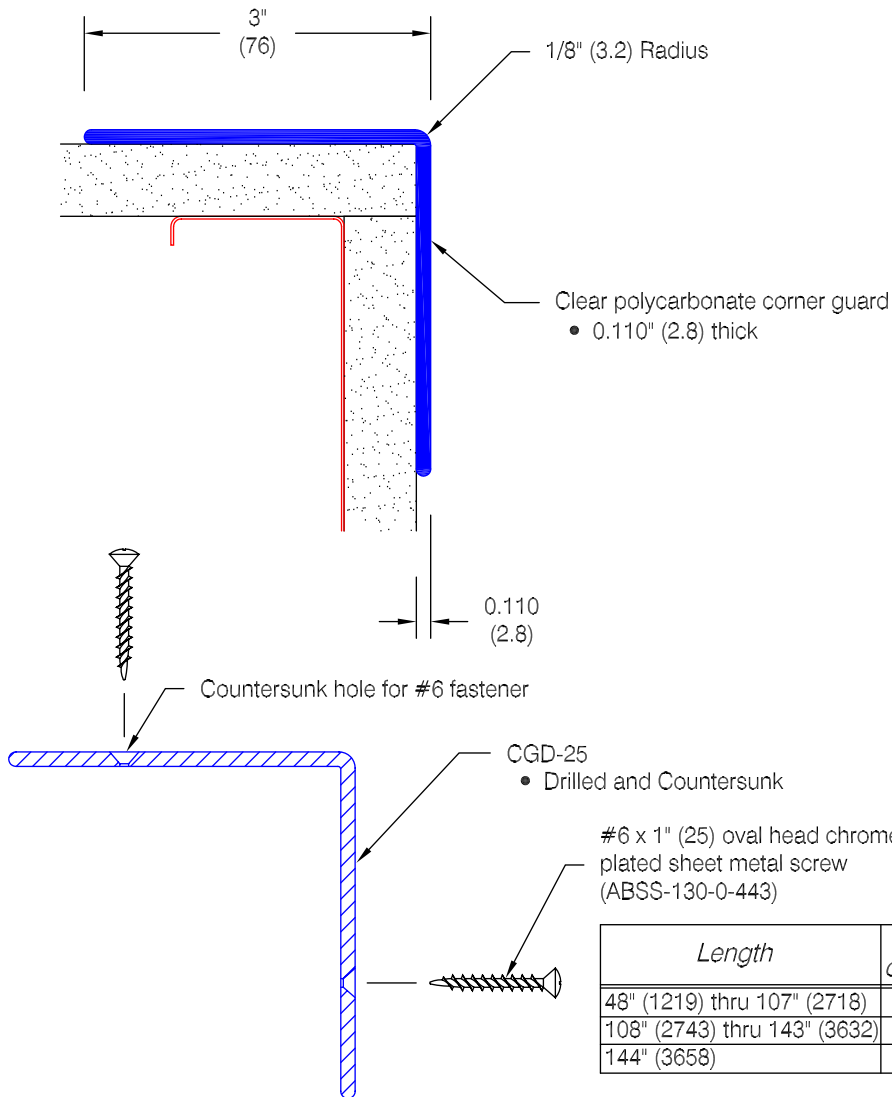


Standard Screw Mounted

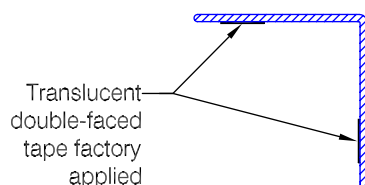

Optional Tape Mounted
(Specify CGT-25)



Optional Undrilled
(Specify CGU-25)

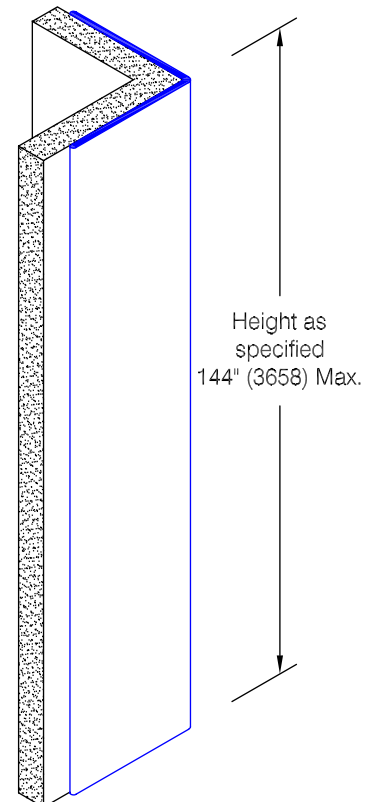

Length	Total # of Screws
48" (1219) thru 107" (2718)	6
108" (2743) thru 143" (3632)	8
144" (3658)	10

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.120.0b
Architect :	Sales Rep :	